


Tucker Coliseum Training Room

Re-locate the whirlpool bath to the Northeast corner, using existing drain... Connect to existing hot and cold water going into shower next room over (running below ceiling)

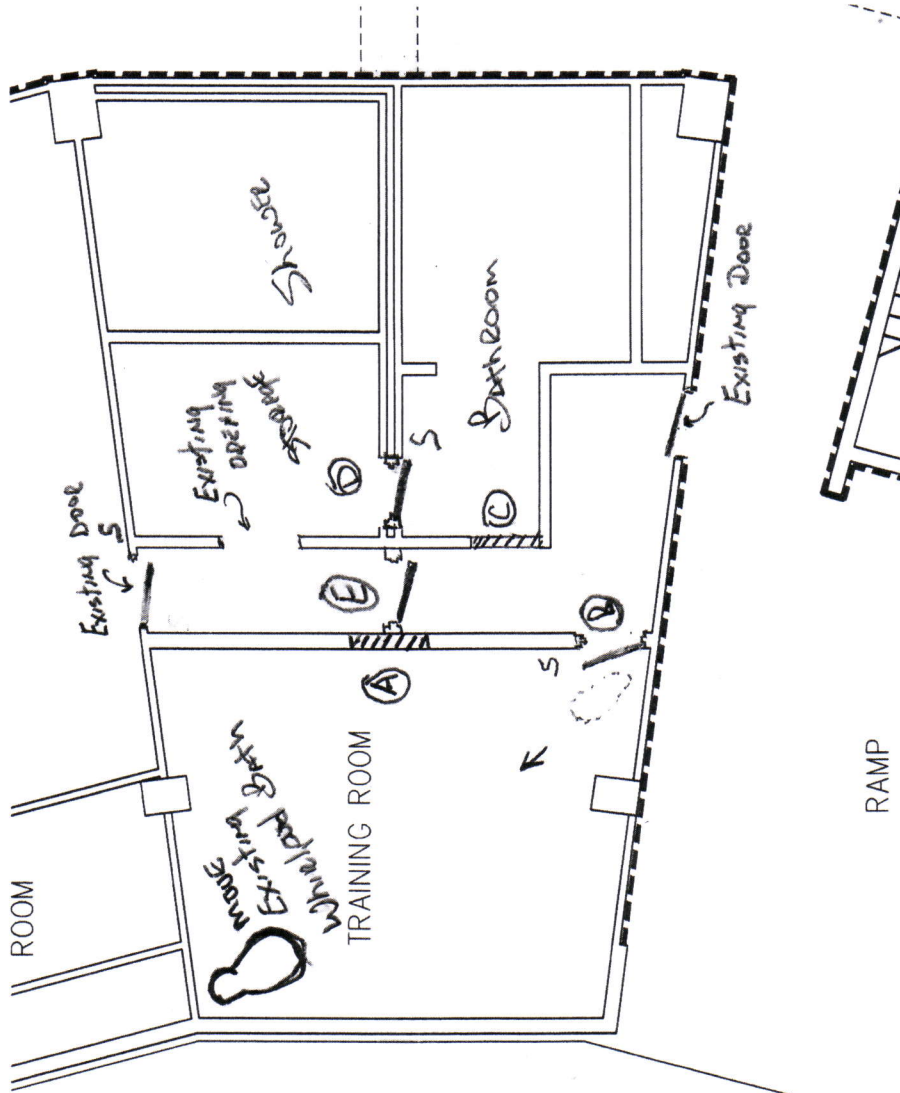

- Remove existing door and frame in-fill with CMU Paint to match existing. Turn door over to the owner—Reuse Lockset on new door.
- Cut CMU for new 30 x 80 door, furnish and install new hollow metal frame, wood door and hardware to match existing. Stain / Paint to match existing.
- In-fill cased opening in bathroom with CMU, paint to match existing walls.

- Re-move existing sink cut/ cap existing drain, plumbing inside wall, remove existing light, Mirror and make ready to cut CMU wall for a new 30 x 80 door. Furnish and install new hollow metal Frame, wood door and hardware to match existing. Stain/ Paint to match existing.
NOTE: PLUMBING CHASE WALL LOOKS TO BE 2- 4 CMU/w 2 INCH VOID
Furnish and install new trough style sink (sim. To Photo)
Move mirror to center sink.

- Furnish and install new 30 x 80 metal hollow frame, wooden door, panic hardware/ lock set and Closer. In-fill sides of frame with metal studs sheetrock and stain / paint to match existing.

NOTE: Move light switches / add switch to light hallway and to put Light switch next to door in training room and bathroom

Demolition Note: When cutting and removing all CMU's use water cutting and cover areas with plastic to contain dust. Remove all construction debris from campus

